

CABLE 133 RF: RF CABLE ASSEMBLY, HIROSE H.FL PLUG + MMCX R/A PLUG + 1.48MM CABLE


SPECIFICATIONS

1. HIROSE H.FL PLUG (H.FL-LP)
2. ϕ 1.48 MIT COAXIAL CABLE, BLACK
3. MMCX RIGHT ANGLE PLUG (C05BA3F178001), GOLD

NOTES:

1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY, IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
2. FIXED ORIENTATION IS POSSIBLE FOR CABLE LENGTH 30MM TO 220MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
3. CONTACT GRAD CONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
4. WORKING FREQUENCY RANGE: DC-3GHz.

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

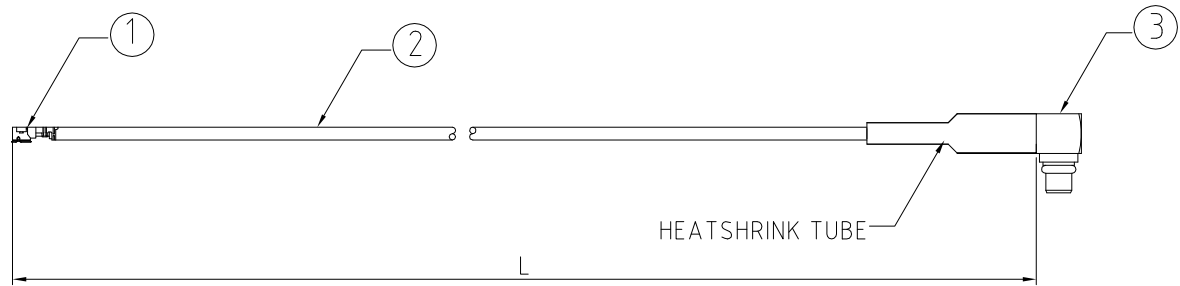


HOW TO ORDER

CABLE 133 RF - XXXX - XX - 0

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. = 0030, MAX. = 2000)
 STANDARD = 0100, 0150, 0200
 Tolerance: <50mm : ± 2 mm.
 51-200mm: ± 5 mm.
 201-500mm: ± 7 mm.
 >501mm: ± 10 mm.

CABLE TYPE:
 0 = ϕ 1.48MM CABLE, COLOR: BLACK

BLANK = DOES NOT HAVE A FIXED ORIENTATION
 F1 = H.FL & MMCX SAME CONNECTION (L=30-220MM)
 F2 = H.FL & MMCX OPPOSITE CONNECTION (L=30-220MM)
 (SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

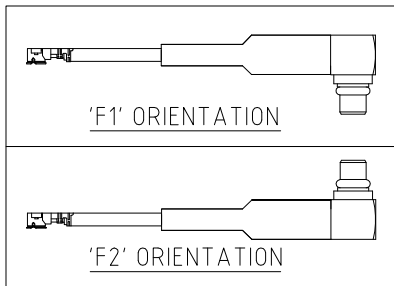

REV. DATE & DRN
 10 20/02/12 - NYW RELEASE
 11 05/02/13 - NYW
 ADD NOTE 4.

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ± 0.2 ± 0.1 ± 0.05 ± 5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 5 FEB '13	Revision: 1.1	Unit: mm		

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: Cable 133 RF
CABLE 133 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E