

CAB579RF: I-PEX MHF I PLUG + I-PEX MHF I LK PLUG + Ø1.37MM CABLE, 6GHz





SPECIFICATIONS

1. I-PEX MHF I PLUG, P/N: 20351-112R-37.
2. Ø1.37MM COAXIAL CABLE, COLOR: BLACK.
3. I-PEX MHF I LK PLUG, P/N: 20670-001R-37+3376-000.

NOTES:

1. WORKING FREQUENCY RAN6E: DC-6GHz
2. OPERATING TEMPERATURE: -40°C TO + 85°C
3. IMPEDANCE: 50 OHM

**USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:**  
 (i) HANDLE WITH CARE.  
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.  
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

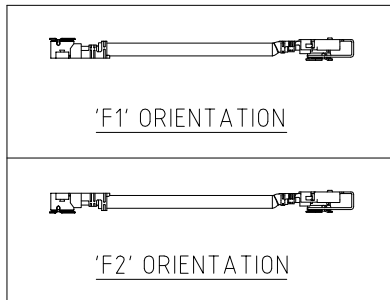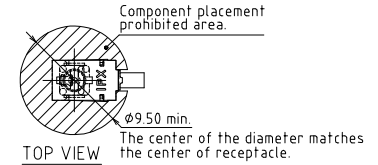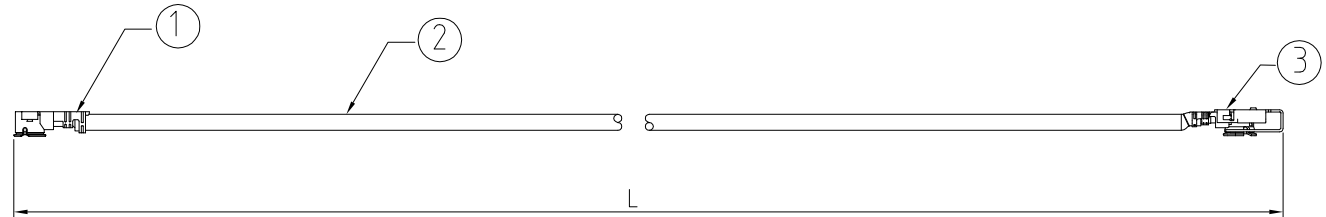

HOW TO ORDER

CAB579RF - X X X X - X X - 1

"L" LENGTH IN MM  
 eg: 100MM = 0100  
 (MIN. 0050-MAX.0400)  
 STANDARD = 0100, 0150, 0200)  
 Tolerance: 50-200mm: ±5mm.  
 201-400mm: ±7mm.

CABLE SIZE:  
 1 = Ø1.37MM CABLE, COLOR: BLACK

ORIENTATION OPTIONS:  
 BLANK = DOES NOT HAVE A FIXED ORIENTATION  
 F1 = OPPOSITE ORIENTATION (L=50-200MM)  
 F2 = SAME ORIENTATION (L=50-200MM)  
 (SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

REV. DATE & DRN  
 1.0 20/06/22 - NYW RELEASE  
 1.1 31/08/23 - NYW  
 \*AMEND FREQUENCY ON NOTE 1.

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ±0.2 ±0.2 ±0.2 N/A	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 31 AUG. '23	Revision: 1.1	Unit: mm		



www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Drawing Number: CAB579RF	
Sheet 1	of 1
Drawing	E and O E