

CABLE 119 RF: RF CABLE ASSEMBLY, HIROSE W.FL + SMA STRAIGHT PLUG + 0.81MM CABLE - 6GHz


SPECIFICATIONS

1. HIROSE W.FL PLUG (W.FL-LP-040)
2. 0.81MM COAXIAL CABLE, COLOR: GRAY
3. SMA STRAIGHT PLUG (RFCT-SMA023-M08)

USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:
 (i) HANDLE WITH CARE.
 (ii) DO NOT TWIST; APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
 (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS.

NOTES:

1, ELECTRICAL
 WORKING FREQUENCY RANGE: DC-6GHz

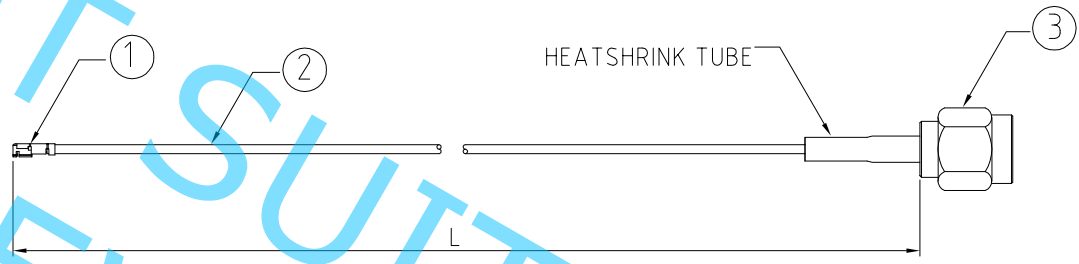

FOR NOT NEW SUITABLE DESIGNS

HOW TO ORDER

CABLE 119 RF - X X X

"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. 025-MAX.400)
 STANDARD = 100, 150, 200)
 Tolerance: <50mm : ±2mm.
 51-200mm: ±5mm.
 201-400mm: ±7mm.

REV. DATE & DRN
 10 08/06/11 - NYW RELEASE
 11 10/06/11 - NYW
 CHANGE WORKING FREQUENCY
 TO 6GHz.
 12 26/11/20 - NYW
 UPDATE SMA P/N

| | | | | |
|-------------------|----------------------|--|---|----------------------|
| Scale: NTS | THIRD ANGLE | Unstated X .XX .XXX ANGLES | Tolerances: N/A N/A N/A N/A | Material SEE NOTE |
| Drawn: NYW | | | | |
| App'd: XXX | Title CABLE ASSEMBLY | NOT TO SCALE | | |
| Date: 26 NOV. '20 | Revision: 13 | Unit: mm | | |



www.gradconn.com

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

| |
|---------------------|
| Type: Cable 119 RF |
| CABLE 119 RF |
| Drawing Number: |
| Sheet 1 of 1 |
| Drawing © E and O E |