

BB02-JU - 2.54mm (0.1") SOCKET, SINGLE ROW, RIGHT ANGLE, SMT TYPE, 02 to 20 CONTACTS





SPECIFICATIONS

CURRENT RATING	3 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN
DIELECTRIC WITHSTANDING	600V AC/DC
CONTACT RESISTANCE	20 MEGOHMS MAX.
OPERATING TEMPERATURE	-40°C TO +105°C
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	THERMOPLASTIC, UL 94V-0
	STANDARD: NYLON 6T
PLATING	GOLD OR TIN OVER 30~50U" NICKEL
SOLDERABILITY	IR REFLOW: 260°C FOR 10 SEC
	MANUAL SOLDER: 350°C FOR 3-5 SEC


NOTES:

1. RECOMMENDED MATING PIN LENGTH: 4.5MM.

MATES WITH : -BB02-HA BB02-HY BB02-TP  
 BB02-HC BB02-TC  
 BB02-HD BB02-TJ  
 BB02-HG BB02-TK

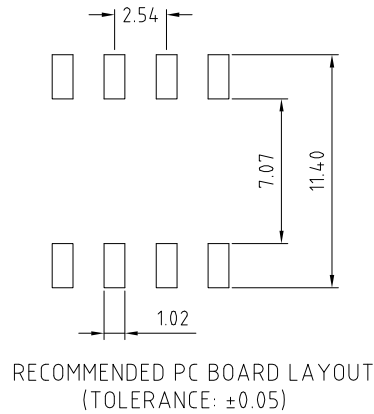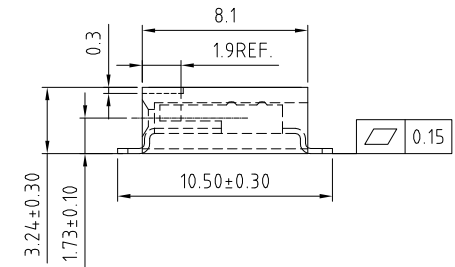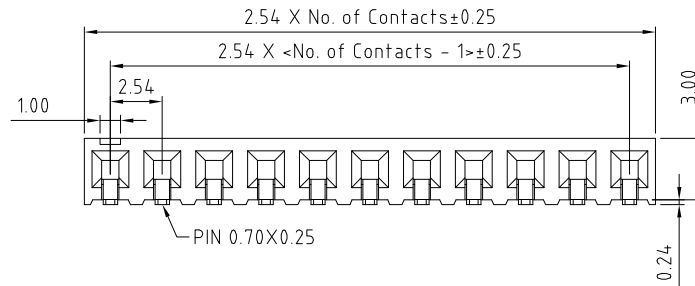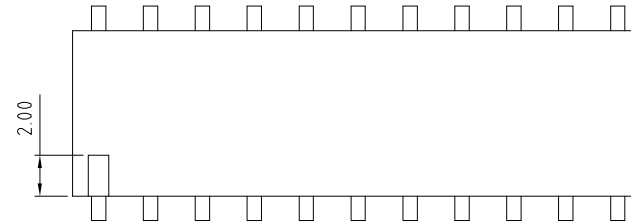

HOW TO ORDER



NO OF CONTACTS:  
02 TO 20

CONTACT PLATING OPTIONS:

- K = GOLD FLASH (STANDARD)
- A = 10U" GOLD ON CONTACT/GOLD FLASH ON TAIL
- B = 15U" GOLD ON CONTACT/GOLD FLASH ON TAIL
- C = 30U" GOLD ON CONTACT/GOLD FLASH ON TAIL
- T = BRIGHT TIN
- M = MATT TIN
- D = GOLD FLASH ON CONTACT/BRIGHT TIN ON TAIL
- E = 10U" GOLD ON CONTACT/BRIGHT TIN ON TAIL
- F = 15U" GOLD ON CONTACT/BRIGHT TIN ON TAIL
- G = 30U" GOLD ON CONTACT/BRIGHT TIN ON TAIL

PACKAGING OPTIONS:  
3 - TUBE  
6 - T & R

Scale 4=1	THIRD ANGLE	Unstated Tolerances X ± 0.30 XX ± 0.25 XXX ± 0.15 XXX ± 0.10	Material SEE NOTE	 www.gradconn.com	Type BB02-JU
Drawn NYW					BB02-JU
App'd XXX	Title SOCKET		NOT TO SCALE		Drawing Number
Date 23 JUL '13	Revision: 1.0		Unit: mm		Sheet 1 of 1
THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT					Drawing  E and O E