
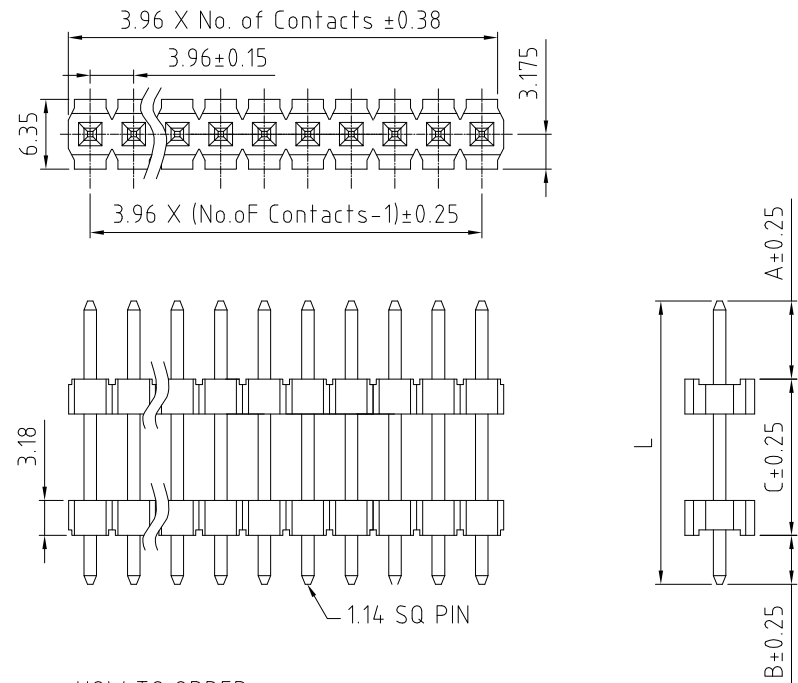


BB02-UJ: 3.96mm (0.156") HEADER, STRAIGHT, THROUGH HOLE, SINGLE ROW - 02 to 24 CONTACTS

SPECIFICATIONS

CURRENT RATING	7.9 AMP
INSULATOR RESISTANCE	1000 MEGOHMS MIN. Δ
CONTACT RESISTANCE	30m ohms MAX. Δ
DIELECTRIC WITHSTANDING	1000V AC/DC Δ
OPERATING TEMPERATURE	-40°C TO +105°C Δ
CONTACT MATERIAL	PHOSPHOR BRONZE
INSULATOR MATERIAL	LCP+30% G/F, UL 94V-0
PLATING	MATT TIN OVER 30-50U" NICKEL
SOLDERABILITY	IR REFLOW: 280°C FOR 10 SEC WAVE: 250°C FOR 5-10 SEC MANUAL SOLDER: 380°C FOR 3-5 SEC

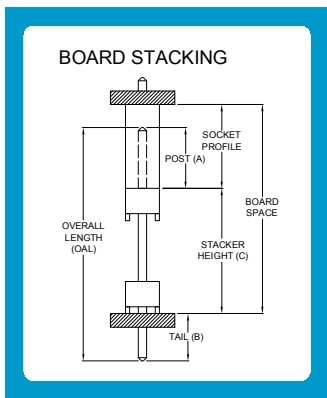


PACKAGE: BULK.

MATES WITH: - BB02-US
BB02-UT

NOTES:

1. GOLD FLASH PLATING IS AVAILABLE UPON REQUEST, PLEASE CONTACT US FOR MORE INFORMATION.

HOW TO ORDER



NO. OF CONTACTS:
02 TO 24


CONTACT PLATING OPTIONS:
M = MATT TIN (STANDARD)

PIN LENGTH CODE (SEE CHART)

<Custom length available, please contact us.>

CODE	L	A	C	B
A1	29.20	7.10	19.80	2.30
A2	29.20	6.00	20.20	3.00
B1	17.15	5.00	9.65	2.50
B2	17.15	7.00	7.15	3.00
C1	14.76	6.10	6.36	2.30
D1	26.10	5.00	18.10	3.00
E1	16.70	3.50	9.70	3.50

(Note: Maximum L length = 40mm.)

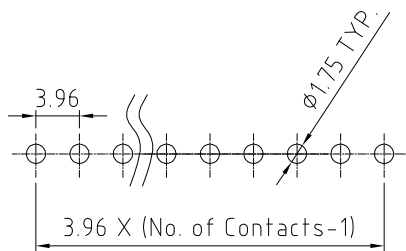

(TOLERANCE: ±0.05)

RECOMMENDED PC BOARD LAYOUT

REV. DATE & DRN	10. 24/07/08 - NYW RELEASE
11. 25/02/08 - NYW MODIFICATION	
12. 02/07/08 - NYW REMOVE OTHER PLATING OPTIONS	
13. 02/10/09 - NYW ADD NOTES 1.	
14. 18/08/11 - NYW AMEND A2-C LENGTH	
15. 02/09/11 - NYW ADD MAX. L LENGTH	
16. 27/07/14 - NYW ADD LENGTH D1 OPTION	
17. 08/10/14 - NYW AMEND SPECIFICATION	
ADD LENGTH OPTION E1.	

Scale: 2:1	THIRD ANGLE	Unstated Tolerances: X ± 0.30 X ± 0.25 XX ± 0.15 XXX ± 0.10	Material SEE NOTE
Drawn: NYW			
App'd: XXXX	Title: HEADER		NOT TO SCALE
Date: 8 OCT. '14	Revision: 17		Unit: mm

www.gradconn.com

THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT

Type: BB02-UJ
BB02-UJ
Drawing Number:
Sheet 1 of 1
Drawing © E and O E