RoHS Complian:

CAB423RF: I-PEX MHF 4L LK PLUG + SMA STRAIGHT BULKHEAD JACK + 1.37MM CABLE, 6GHz

SPECIFICATIONS :


- 1. I-PEX MHF 4L LK PLUG. P/N:20632-001R-37. LOCK: 3615-000
- 2. 1.37MM COAXIAL CABLE, COLOR: BLACK
- 3. SMA STRAIGHT BULKHEAD JACK, P/N: RFCT-SMA004-F37.


NOTES:


- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY. IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 50MM TO 100MM. PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1. F2. ETC)
- 3. CONTACT GRADCONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN.
- 4. WORKING FREQUENCY RANGE: DC-6GHz.
- 5. OPERATING TEMPERATURE: -40°C~+85°C.
- 6. IMPEDANCE: 50 Ohm.


USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE.
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEETS FOR DETAILED NOTES ON HANDLING INSTRUCTIONS

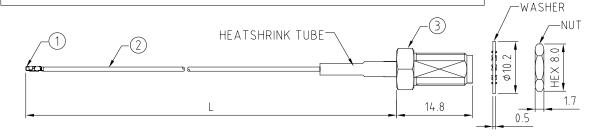

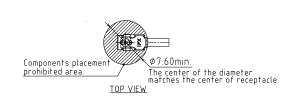

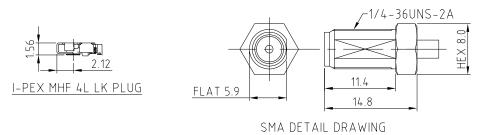

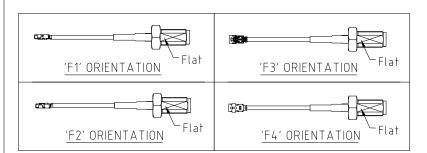

CAB423RF - X X X X - X X - X - 1 CABLE SIZE: "L" LENGTH IN MM 1 = Ø1.37MM CABLE, COLOR: BLACK eq: 100MM = 0100 WASHER AND NUT OPTIONS: (MIN. 0050-MAX.0400 BLANK = SEPARATELY PACKED (STANDARD) STANDARD = 0100.0150.0200) A = ASSEMBLED WITH CONNECTOR TOLERANCE: 50-200mm: ±5mm. ORIENTATION OPTIONS: 201-400mm: ±7mm.

THIRD ANGLE

Revision: 1.1

Title CABLE ASSEMBLY

HOW TO ORDER

NTS

NYW

XXX

Date: 5 MAY '21

Scale:

Drawn:

App'd:

BLANK = DOES NOT HAVE A FIXED ORIENTATION F1 = MHF CONNECTION DOWN (L=50-200MM) F2 = MHF CONNECTION UP (L=50-200MM)

F3 = MHF CONNECTION AND D FLAT SAME ORIENTATION (L=50-200MM) F4 = MHF CONNECTION AND D FLAT OPPOSITE ORIENTATION (L=50-200MM)

Unstated

.X .XX

XXX

ANGLES

Unit: mm

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)



Drawing Number CAB423RF

RECOMMENDED SMA

MOUNTING HOLE

Ø6.5±0.1

of 1 Sheet 1 THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT Drawing (C) E and 0 E

V. DATE & DRN	08/09/'20 - NYW RELEASE	05/05/'21 - NYW AMEND MHF 4L LK DRAWING.
Æ.	1.0 0	1.1 O