


CABLE 185 RF: RF CABLE ASSEMBLY, RP SMA ST PLUG + SMA FEMALE BULKHEAD WITH O-RING + RG316 CABLE - 6GHz

SPECIFICATIONS:

1. RP SMA STRAIGHT PLUG P/N: C19AA31174004A
2. RG316 COAXIAL CABLE, COLOR: BROWN.
3. SMA STRAIGHT BULKHEAD JACK WITH O-RING, P/N: C02AD31174005A

NOTES:

1, ELECTRICAL WORKING FREQUENCY RANGE: DC-6GHz

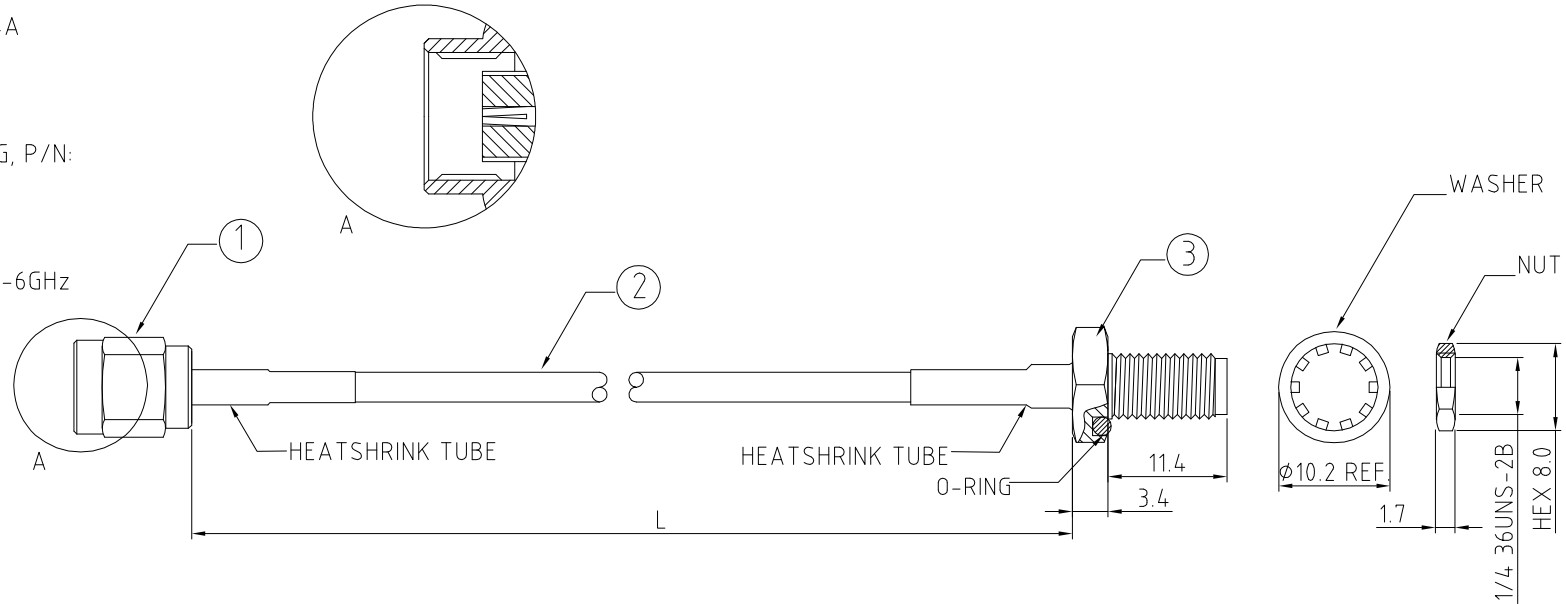


HOW TO ORDER

CABLE 185 RF - X X X X - X - 1


"L" LENGTH IN MM
 eg: 100MM = 0100
 (MIN. = 0050, MAX. = 2000)
 STANDARD = 0100, 0150, 0200
 Tolerance: <50mm : ± 2 mm.
 51-200mm: ± 5 mm.
 201-500mm: ± 7 mm.
 >501mm: ± 10 mm.

CABLE SIZE:
 1 = RG316 CABLE, COLOR: BROWN

WASHER AND NUT OPTIONS:
 BLANK = SEPERATELY PACKED (STANDARD)
 A = ASSEMBLED WITH CONNECTOR

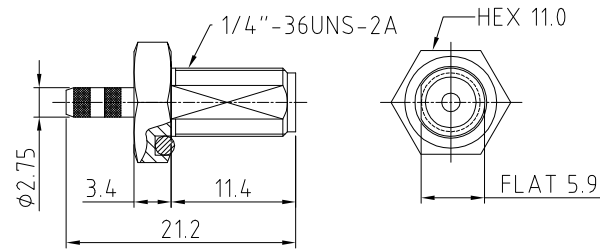

SMA JACK DETAIL DRAWING



RECOMMENDED SMA MOUNTING HOLE

REV. DATE & DRN
 TO 07/11/14 - NYW RELEASE

Scale: NTS	THIRD ANGLE	Unstated X .XX .XXX ANGLES	Tolerances: ± 0.2 ± 0.1 ± 0.05 ± 5	Material SEE NOTE
Drawn: NYW				
App'd: XXX	Title: CABLE ASSEMBLY	NOT TO SCALE		
Date: 7 NOV. '14	Revision: 1.0	Unit: mm		

GradConn
 www.gradconn.com

Type: Cable 185 RF
CABLE 185 RF
Drawing Number:
Sheet 1 of 1
Drawing © E and O E

© THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT